


Oil & Gas

**STABILIZERS** 



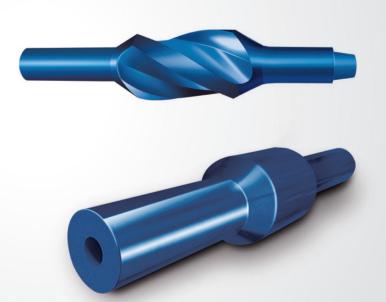

## STABILIZERS MAGNETIC & NON MAGNETIC

## Our Integral Stabilizers are processed and forged by special technologies as per API 7-1

- Q&T as per API Spec. 7-1, NS-1 and DS-1 properties.
- UT & MPI Inspections.
- · Connections threaded or blank ended.
- · Cold roll threads.
- Stress relief grooves (SRG Pin) and boreback (Box).
- We can supply forging stabilizer or finish integral blade stabilizers, including threads.
- · Hardfacing: Tungsten carbide overlays.
- Stabilizers are available from OD 6" to 26"
- Larger dimentions (28" to 36") as per requirements.

## **DIMENSIONAL DATA - INTEGRAL BLADE STABILIZERS**

HOLE SIZE (in)	FISHING NECK (Dia. in)	BORE (Dia. in)	FISHING NECK (Lgth. in)	TONG SPACE (Lgth. in)	OVERALL (Lgth. in)	MIN. CROWN (Lgth. in)	BLADE WIDTH (in)	APPROX. WT. (lbs)
5-5/8 5-7/8 6	4-1/8	2	23	18	60	16	2	280
6-1/8 6-1/4 6-1/2 6-5/8 6-3/4	4-3/4	2 - 2-1/4	28	17	60	16	2	370
7-3/8 7-5/8 7-7/8	6-1/4	2-1/4	28	18	72	18	2-1/2	560
8-3/8 8-1/2 8-5/8 8-3/4	6-1/4 - 6-3/4	2-1/4 - 2-1/2	34	28	84	18	2-1/2	720
9 9-1/2 9-5/8 9- 7/8	6-3/4 - 7-3/4	2-1/4 - 2-1/2	32	30	87	18	2-1/2 - 2-3/4	1100
10-5/8 11 12 12-1/4	8 - 9-1/2	2-13/16 - 3	36	27	95	18	3	1400 - 2050
13-1/2 14-3/4	8 - 9-1/2	2-13/16	32	30	101	18	3-1/4	2200
16-1/2 17-1/2 18-1/8	8 - 9-1/2	3	33 - 35	31 - 32	103	18 - 20	3-1/2	2700
20 22 24 26	8 - 9-1/2	3	40	35	120	18 - 20	4	4600